

HYDROARTICA-34

LIMPIEZA TOTALMENTE AUTOMATIZADA DE INTERCAMBIADORES Y QUEMADOR.
 FULLY AUTOMATIC CLEANING OF EXCHANGERS AND BURNER.
 LIMPEZA TOTALMENTE AUTOMÁTICA DOS PERMUTADORES E DO QUEIMADOR.
 PULIZIA COMPLETAMENTE AUTOMATIZZATA DEGLI SCAMBIATORI E DEL BRUCIATORE.
 NETTOYAGE ENTIEREMENT AUTOMATISÉ DES ÉCHANGEURS ET DU BRÛLEUR.




kW	kW Max	kW	kW_w	kW_w	%	%			W		
34,3-12	37,6	34,5	31,4-10,4	31,3	92-96	92	7,6-2,5	8,3	150-500	785	
										bar	
782	154			13-40	13	310	100	80		1,5	
bar max										ACS	
2,5	8	40/80			314*	225*	313*	224*			
S2				A							

VAL-02/VAL-04/CRONO-01/PE-130

Features

- Oasys
- Modulation System
- Model designed for easy access to maintenance service
- Model Compatible with Kit Gprs
- Programmable
- Power max: 37,3kw
- Power max-min: 34,3-12kw
- Power with olive stone max: 37,6kw
- Power with olive stone: 34,5kw
- Power transferred to the water: 31,4-10,4kw
- Power transferred to the water with olive stone: 31,3kw
- Efficiency: 92-96 %
- Efficiency with bone: 92%
- Consumption max-min: 7,6-2,5 kg/h
- Consumption with bone: 8,3kg/h
- Power consumption: 150-500W
- Heating capacity (m3): 785 m3

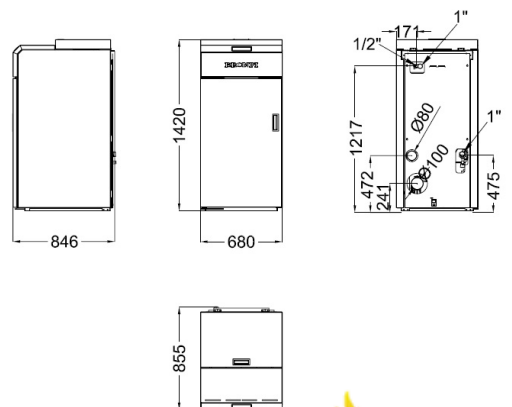

Given the continued improvement of our products and improving our manufacturing process, size, aesthetics and product specifications are subject to change without prior notice from our company.

www.bronpi.com



Features

- Heating capacity with olive stone (m3): 782m3
- Tank capacity: 154 liters
- Metallic interior
- Cast-iron burner
- Autonomy (min-max): 13-40h
- Autonomy with olive stone (min-max): 9,8-32h
- Weight: 310kg
- Fume outlet diameter: 100mm
- Air inlet diameter: 80mm
- Multifuel
- Working pressure: 1,5bar
- Working maximum pressure: 2,5bar
- Closed expansion vessel: 8 l
- Maximum service temperature: 40/80°C
- Valve for drinking water
- Circulating pump
- Underfloor heating: 314*(m2)
- N° radiator elements: 225*
- Underfloor heating with olive stone: 313*(m2)
- N° radiator elements with olive stone: 224*
- Hermetic tank
- Management Heating / Sanitary Water
- S2:Security system: S2. Safety thermostat pellet, Safety thermostat water, Air flow switch, Safety valve 3 bar, Pressure setting valve
- Compatible accessories not included: VAL-02/VAL-04/CRONO-01/PE-130
- Multifuel boiler certified for burning pellet and olive stones
- Fully automatic cleaning of exchangers and burner
- Stainless steel support and scrapers
- New version of the base-cleaning system
- Black heat resistant paint and epoxy paint coating
- Stainless steel handles and cast-iron burner
- Thermally insulated chamber
- Combustion chamber window
- Automatic air vent included.
- Double door with vermiculite interior
- Exterior door with thermal insulation
- LCD Display with light for easy operation in dark room
- Height adjustable levelling feet
- Easy access for cleaning and maintenance tasks
- * The calculation of radiators and underfloor heating has been determined according to normal conditions of a house insulation, located in a temperate zone. Aluminium radiator elements have been considered with a height of 60cm and a temperature difference of 50°, 120 kcal/element. Check characteristics (power) of the radiator.

Given the continued improvement of our products and improving our manufacturing process, size, aesthetics and product specifications are subject to change without prior notice from our company.

www.bronpi.com

