

# CARLOTA-NE


LIMPIEZA TOTALMENTE AUTOMATIZADA DE INTERCAMBIADORES Y QUEMADOR.  
FULLY AUTOMATIC CLEANING OF EXCHANGERS AND BURNER.  
LIMPEZA TOTALMENTE AUTOMÁTICA DOS PERMUTADOTES E DO QUEIMADOR.  
PULIZIA COMPLETAMENTE AUTOMATIZZATA DEGLI SCAMBIATORI E DEL BRUCIATORE.  
NETTOYAGE ENTièrement AUTOMATISÉ DES ÉCHANGEURS ET DU BRÛLEUR.



	SC2	SCL	M							23
21-7	20-6,5	91-96	4,9-1,5	150-500	507	74	9,8-32	198	80	
60	1,5	2,5	8	40/80			200*	145*		
VAL-02/VAL-04										

## Features

- Oasys
- Double Chamber System
- Clean Glass System
- Modulation System
- Model designed for easy access to maintenance service
- Programmable
- Power max: 23kw
- Power max-min: 21-7kw
- Power transferred to the water: 20-6,5kw
- Efficiency: 91-96 %
- Consumption max-min: 4,9-1,5 kg/h
- Power consumption: 150-500W
- Heating capacity (m3): 507 m3
- Tank capacity: 74 l
- Metallic interior
- Autonomy (min-max): 9,8-32h
- Weight: 198kg
- Fume outlet diameter: 80mm
- Air inlet diameter : 60mm
- Working pressure: 1,5bar

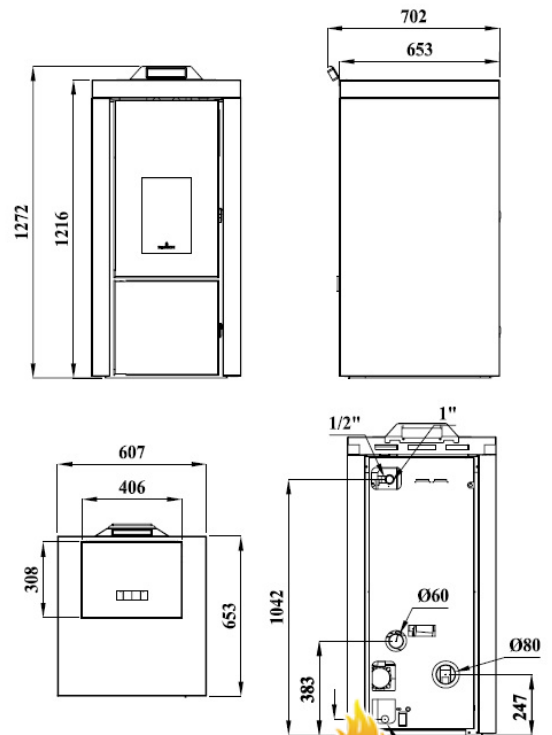

Given the continued improvement of our products and improving our manufacturing process, size, aesthetics and product specifications are subject to change without prior notice from our company.

[www.bronpi.com](http://www.bronpi.com)



## Features

- Working maximum pressure: 2,5bar
- Closed expansion vessel: 8 l
- Maximum service temperature: 40/80°C
- Valve for drinking water
- Circulating pump
- Underfloor heating: 200\*(m2)
- N° radiator elements: 145\*
- Hermetic tank
- Management Heating / Sanitary Water
- Security system: S2. Safety thermostat pellet, Safety thermostat water, Air flow switch, Safety valve 3 bar, Pressure setting valve
- Compatible accessories not included: VAL-02/VAL-04
- Multifuel boiler certified for burning pellet and olive stones
- Stainless steel support and scrapers
- New version of the base-cleaning system
- Cast-iron burner
- Thermally insulated chamber
- Combustion chamber window
- Automatic air vent included
- LCD Display with light for easy operation in dark room
- Height adjustable levelling feet
- Easy access for cleaning and maintenance tasks
- \* The calculation of radiators and underfloor heating has been determined according to normal conditions of a house insulation, located in a temperate zone. Aluminium radiator elements have been considered with a height of 60cm and a temperature difference of 50°, 120 kcal/element. Check characteristics (power) of the radiator.

Given the continued improvement of our products and improving our manufacturing process, size, aesthetics and product specifications are subject to change without prior notice from our company.

[www.bronpi.com](http://www.bronpi.com)

