

CARLOTA-NE



LIMPIEZA TOTALMENTE AUTOMATIZADA DE INTERCAMBIADORES Y QUEMADOR.
 FULLY AUTOMATIC CLEANING OF EXCHANGERS AND BURNER.
 LIMPEZA TOTALMENTE AUTOMÁTICA DOS PERMUTADOTES E DO QUEIMADOR.
 PULIZIA COMPLETAMENTE AUTOMATIZZATA DEGLI SCAMBIATORI E DEL BRUCIATORE.
 NETTOYAGE ENTIÈREMENT AUTOMATISÉ DES ÉCHANGEURS ET DU BRÛLEUR.



TERMOESTUFA MULTIFUEL CERTIFICADA PARA PELLETT Y HUESO DE ACEITUNA.
 MULTIFUEL BACK BOILER CERTIFIED FOR BURNING PELLETT AND OLIVE STONES.
 TERMOSALAMANDRA MULTIFUEL CERTIFICADA PARA PELLETT E CARROÇO DE AZEITONA.
 TERMOSTUFA MULTIFUELE CERTIFICATA PER PELLETT E GUSCI DI OLIVE
 THERMOPOÊLE CERTIFIÉ POLYCOMBUSTIBLE À PELLETTES ET NOYAU D'OLIVE




©Bronpi Calefacción, S.L. reserves all rights to the images that appear in this document. You may not reproduce or distribute part or all of the photographs and as the text. Both the brand as distinctive symbols are the exclusive property of the company. Violators will be prosecuted accordingly.

											23,3
25,4	21,2-7,2	23,3	20,3-6,9	20,3	91-96	92	4,9-1,5	5,6	150-500	507	
507	74		9,8-32	9,6	198	80	60		1,5	2,5	
8	40/80			200*	145*	200*	143*				

VA-04/CRONO-01/PE-130
Features



- Oasys
- Double Chamber System
- Clean Glass System
- Modulation System
- Model designed for easy access to maintenance service
- Programmable
- Power max: 23,3kw
- Power max with olive stone: 25,4kw
- Power max-min: 21,2-7,2kw
- Power with olive stone: 23,3kw
- Power transferred to the water: 20,3-6,9kw
- Power transferred to the water with olive stone: 20,3kw
- Efficiency: 91-96 %
- Efficiency with olive stone: 92%
- Consumption max-min: 4,9-1,5 kg/h
- Consumption with olive stone (kg/h): 5,6kg/h
- Power consumption: 150-500W
- Heating capacity (m3): 507 m3
- Heating capacity with olive stone (m3): 507m3

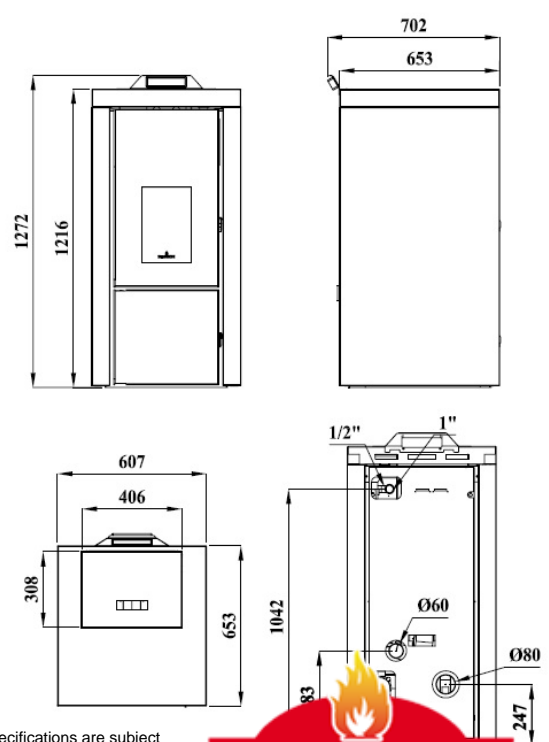

Given the continued improvement of our products and improving our manufacturing process, size, aesthetics and product specifications are subject to change without prior notice from our company.

www.bronpi.com



Features

- Tank capacity: 74 l
- Metallic interior
- Autonomy (min-max): 9,8-32h
- Autonomy with olive stone: 9,6h
- Weight: 198kg
- Fume outlet diameter: 80mm
- Air inlet diameter : 60mm
- Multifuel
- Working pressure: 1,5bar
- Working maximum pressure: 1,5bar
- Closed expansion vessel: 8 l
- Maximum service temperature: 40/80°C
- Valve for drinking water
- Circulating pump
- Underfloor heating: 200*(m2)
- N° radiator elements: 145*
- Underfloor heating olive stone: 200*(m2)
- N° radiator elements olive stone: 143*
- Hermetic tank
- Management Heating / Sanitary Water
- Security system: S2. Safety thermostat pellet, Safety thermostat water, Air flow switch, Safety valve 3 bar, Pressure setting valve
- Compatible accessories not included: VAL-02/VAL-04/CRONO-01/PE-130
- Multifuel boiler certified for burning pellet and olive stones
- Stainless steel support and scrapers
- New version of the base-cleaning system
- Cast-iron burner
- Thermally insulated chamber
- Combustion chamber window
- Automatic air vent included
- LCD Display with light for easy operation in dark room
- Height adjustable levelling feet
- Easy access for cleaning and maintenance tasks
- * The calculation of radiators and underfloor heating has been determined according to normal conditions of a house insulation, located in a temperate zone. Aluminium radiator elements have been considered with a height of 60cm and a temperature difference of 50°, 120 kcal/element. Check characteristics (power) of the radiator.

Given the continued improvement of our products and improving our manufacturing process, size, aesthetics and product specifications are subject to change without prior notice from our company.

www.bronpi.com

