


PARIS 55 / PARIS 55 VISION

OPCIONAL KIT-AIR2: KIT CON TOMA DE AIRE EXTERNO. PARA CONVERTIR EN ESTANCO.
 OPTIONAL KIT-AIR2: KIT WITH EXTERNAL AIR INTAKE. FOR HERMETIC SYSTEM.
 KIT-AIR2 OPCIONAL: KIT COM ENTRADA DE AR EXTERIOR. PARA PASSAR A ESTANQUE.
 OPZIONALE KIT-AIR2: KIT CON PRESA DI ARIA ESTERNA. PER RENDERLO STAGNO.
 OPTIONNEL KIT-AIR2: KIT AVEC PRISE D'AIR EXTERNE. POUR LE TRANSFORMER EN ÉTANCHE.



SILENCIOSA
 NOISELESS
 SILENCIOSA
 SILENCIEUX
 SILENZIOSA

POSIBILIDAD DE DESCONEXIÓN DE LA TURBINA.
 POSSIBILITY OF TURNING OFF THE TURBINE.
 POSSIBILIDADE DE DESCONEXÃO DA TURBINA.
 POSSIBILITÉ DE DÉCONNECTER LA TURBINE.
 POSSIBILITÀ DI DISCONNESSIONE DELLA TURBINA



9,5




77



2,7



238



108



150



2x120



1x225




447x312x286



47

Features

- Double Combustion System
- Clean Glass System
- Heating power: 9,5kw
- Efficiency (%): 77%
- Consumption (kg/h): 2,7kg/h
- Heating capacity (m3): 238m3
- Cast-iron interior
- Manufactured in cast-iron and sheet
- Weight (kg): 108kg
- Smoke exit tube diameter (mm): 150mm
- Air channel (diameter and exit tube number): 2x120
- Forced ventilation: 1x225
- Useful chamber measures: 447x312x286mm
- Maximum logs size (cm): 47cm

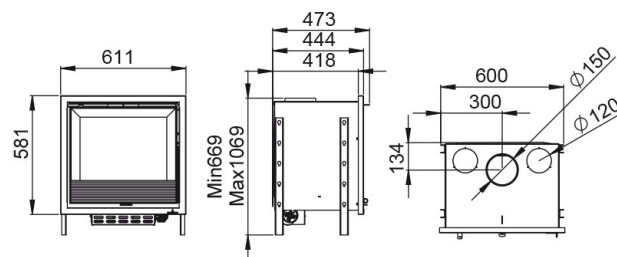

Given the continued improvement of our products and improving our manufacturing process, size, aesthetics and product specifications are subject to change without prior notice from our company.

www.bronpi.com



la excelencia en el fuego