

# LETICIA HYDRO


PUERTA EN CRISTAL VITROCERÁMICO SERIGRAFIADO COLOR NEGRO.  
SCREEN-PRINTED BLACK GLASS DOOR.  
PORTA DE VIDRO VITROCERÁMICO SERIGRAFADA COR PRETA.  
PORTA IN VETRO CERAMICO SERIGRAFATO NERO.  
PORTE EN VITRE VITROCÉRAMIQUE SÉRIGRAPHIÉE NOIR.

©Bronpi Calefacción, S.L. reserves all rights to the images that appear in this document. You may not reproduce or distribute part or all of the photographs and as the text. Both the brand as distinctive symbols and as the text. Both the brand as distinctive symbols are the exclusive property of the company. Violators will be prosecuted according to law.



## Features

- Oasys Plus
- Double Chamber System
- Clean Glass System
- Modulation System
- Model designed for easy access to maintenance service
- Model Compatible with Kit Wifi
- Programmable
- Power max: 16,4kw
- Power max-min: 15-6kw
- Power transferred to the air max-min: 2,9-1,5kw
- Efficiency: 92-96%
- Consumption max-min: 3,3-1,2kg/h
- Electric power: 150-300W
- Heating capacity: 375m3
- Tank capacity: 21 kg
- Metallic interior
- Cast-iron burner
- Autonomy (min-max): 6,4-17,5h
- Weight: 129kg
- Smoke exit tube diameter: 80mm

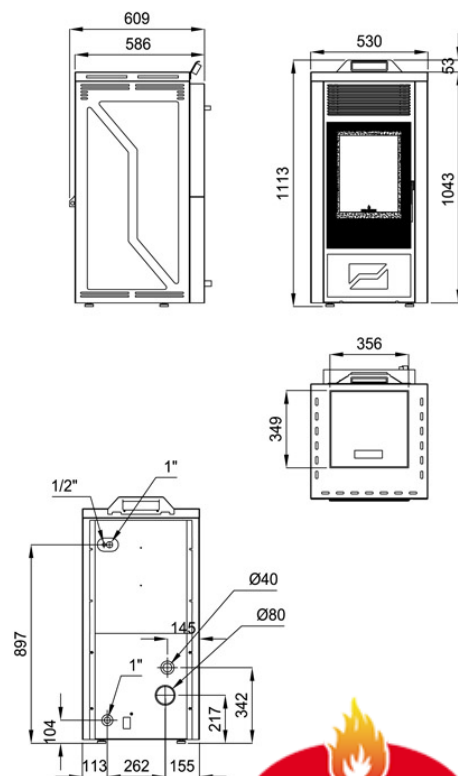

Given the continued improvement of our products and improving our manufacturing process, size, aesthetics and product specifications are subject to change without prior notice from our company.

[www.bronpi.com](http://www.bronpi.com)



la excelencia en el fuego

## Features

- Air inlet tube diameter: 40mm
- Working pressure: 1,5 bar
- Working maximum pressure: 2,4bar
- Remote control or switchboard
- Closed expansion vessel: 8 l
- Maximum service temperature: 40/80
- Valve for draining water
- Circulating pump
- Underfloor heating: 120\*(m2)
- N° radiator elements: 82\*
- Security system: S2. Safety thermostat pellet, Safety thermostat water, Air flow switch, Safety valve 3 bar, Pressure setting valve
- Compatible accessories not included: KIT WIFI/VAL-02/VAL-04/CRONO-01
- \* The calculation of radiators and underfloor heating has been determined according to normal conditions of a house insulation, located in a temperate zone. Aluminium radiator elements have been considered with a height of 60cm and a temperature difference of 50°, 120 kcal/element. Check characteristics (power) of the radiator.

Given the continued improvement of our products and improving our manufacturing process, size, aesthetics and product specifications are subject to change without prior notice from our company.

**www.bronpi.com**



*la excelencia en el fuego*