




©Bronpi Calefacción, S.L. reserves all rights to the images that appear in this document. You may not reproduce or distribute part or all of the photographs and as the text. Both the brand as distinctive symbols are the exclusive property of the company. Violators will be prosecuted according to law.



					KIT WIFI, CANALIZATION KIT					

## Features

- CANALIZATION KIT OPTIONAL
- Oasys Plus
- Double Chamber System
- Clean Glass System
- Modulation System
- Model designed for easy access to maintenance service
- Model Compatible with Kit Wifi
- Programmable
- Flame anti-return system
- Chamber overpressure valve
- Power max: 12kw
- Power max-min: 11-4,5kw
- Efficiency: 90-93%
- Consumption max-min: 2,5-1kg/h
- Electric power: 150-300W
- Heating capacity: 275m3
- Tank capacity: 19kg/h
- Cast-iron interior
- Cast-iron burner
- Autonomy (min-max): 7,6-19h
- Weight: 121kg
- Smoke exit tube diameter: 80mm
- Air inlet tube diameter: 50mm
- Forced ventilation: 1x430

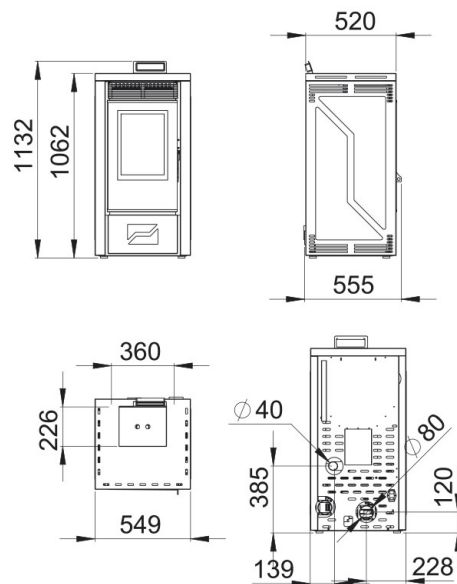

Given the continued improvement of our products and improving our manufacturing process, size, aesthetics and product specifications are subject to change without prior notice from our company.

[www.bronpi.com](http://www.bronpi.com)



## Features

- Remote control or switchboard
- S1:Security systems: Safety thermostat pellet, Air flow switch
- Compatible accesories not included: KIT WIFI, CANALIZATION KIT